

DS-7604NI-S Embedded NVR




Key Features


- H.264/MPEG-4 video stream input
- Up to 5 Megapixels (2560×1920) resolution recording
- VGA output at 1024×768 resolution
- 4x digital zoom capability
- 4-ch synchronous playback

Specifications

DS-7604NI-S	
Video / Audio input	
IP Video input	4-ch 4CIF real time or 2-ch 720P / UXGA / 1080P real time or 1-ch 2560×1920 not real time
Audio input	1-ch, RCA(2.0 Vp-p, 1 kΩ), for voice talk input
Video / Audio output	
Live view resolution	PAL:704×576, NTSC:704×480
VGA output	1-ch, resolution:1024×768 /60 Hz
Playback resolution	2560×1920/ UXGA / 1080P / 720P / 4CIF / VGA / DCIF / 2CIF/ CIF / QCIF
Video output	1-ch, BNC (PAL: 704×576, NTSC: 704×480)
Frame rate	25fps (P) / 30fps (N)
Video bit rate	32 Kbps~2048 Kbps, or user defined (max. 16384 Kbps)
Audio output	1-ch, RCA(2.0 Vp-p, 1 kΩ), for voice talk output
Audio bit rate	16kbps
Synchronous playback	4-ch
Hard disk	
SATA	1 SATA interface
Capacity	Up to 2TB capacity for each disk
External interface	
Network interface	1, RJ45 10M / 100M self-adaptive ethernet interface
Serial interface	1 RS-485 interface
USB interface	2, USB2.0
Alarm in	4
Alarm out	1
General	
Power supply	12 VDC
Consumption	≤ 12W (without hard disk or DVD-R/W)
Working temperature	-10 °C ~ +55 °C
Working humidity	10%~90%
Dimensions (W x D x H)	315 × 230 ×45 mm
Weight	≤ 2.5kg (without HDD or DVD-R/W)

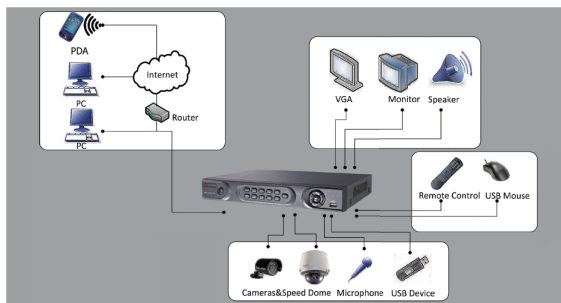

Rear Panel of DS-7604 NI-S

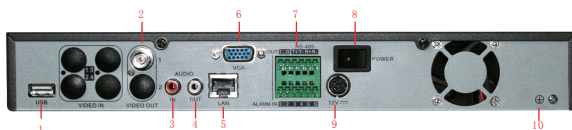

1. USB interface
2. Video out
3. Audio in
4. Audio out
5. LAN
6. VGA interface
7. RS-485 interface, alarm in, alarm out
8. Power switch
9. 12 VDC power supply
10. GND